


DGS-2 single shielded microphone (7010x)

Balanced microphone cable with single shield, high flexible, velvet faint PVC jacket. Industrial standard clone product very similar to competition products of the industry. Economical standard shielding. Very competitive prices possible for larger orders.

Check our OEM prices and special branded productions just for you!
Limited availability! Minimum order can apply!

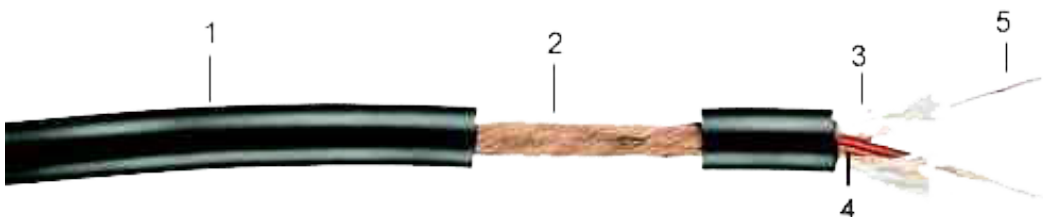

1	Jacket	PVC, \varnothing 6.0 mm, max.
2	Shield	Bare copper wires (0.10 mm), 100% coverage
3	Filling material	Viscose
4	Insulation	PE, \varnothing 1.50 mm
5	Conductor	Stranded bare copper wires, 28 x 0.10 mm (0.22 mm ²)

Conductor resistance	< 85 Ohm /km	Test voltage cond/cond	500 V eff.
Shielding resistance	< 40 Ohm /km	Test voltage cond/shield	2000 V eff.
Insulation resistance	>200 MOhm /km	Operating voltage	low voltage
Capacitance cond/cond	< 62 nF /km	Temperature range (flex)	- 5° to +50° C
Capacitance cond/shield	< 116 nF /km	Temperature range (fix)	-30° to +70° C

Order No.	Type	\varnothing mm	Color	Spool Size	Weight /Spool	Shipping Unit
70101	DGS-2	6.0	red	100 m	4.5 kg	4 x 100 m
70104	DGS-2	6.0	blue	100 m	4.5 kg	4 x 100 m
70106	DGS-2	6.0	yellow	100 m	4.5 kg	4 x 100 m
70108	DGS-2	6.0	black	100 m	4.5 kg	4 x 100 m

Contact us for availability. Limited stock on hand. This is not a standard stocked product. Minimum orders can apply

the world wide best choice in professional wiring

construction

specifications

ordering data