


GAC-1 x DMX & 2x1.50 mm² 110 Ohm media control cable (10686)

1x DMX signal 110 ohm, digital, stabilized impedance for safe datatransfer with a 2x1.5mm² DC low voltage power line combined hybrid cable.

LFOC higher grade copper at best standards for best performance. This cable is also capable to be used for AES digital audio or balanced analog audio signals.

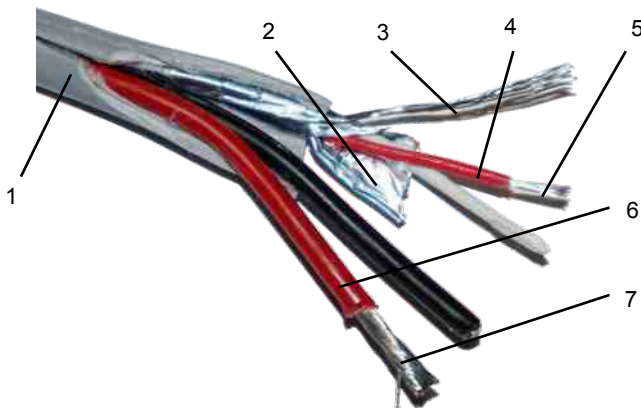

110 Ohm DMX line

1	Jacket	FRNC Halogenfree comp.
	Diam. max.	ø 6.50 mm
	Color	light grey
2	Shield	Alpet foil
3	Drain wire	ø 7 x 0.20 mm SnCu
4	Insulation	PEE-02Y1 1
	Nom. insul.diam.	ø 1.15 mm
	Color code	white / red
5	Cond. 0.15 mm ²	ø 19 x 0.10 SnCu

DC-Power line 2x1.50 mm²

6	Nom. insul. diam	ø 2.20 mm
	Color code	black / red
7	Conductor 1.5 mm ²	ø 30 x 0.25 SnCu
	Nom. diameter	ø 1.50 mm ²

Characteristic impedance	110 Ohm	Conductor resistance	< 13.3 Ohm/km
Nominal capacitance	50 pF /mt.	Rating voltage	Low voltage
Conductor resistance	< 116 Ohm /km	Test voltage	1000 V
Rating voltage	100 V		
Test voltage	800 V		

Order No.	Type	ø mm	Color	Spool Size	Weight /Spool	Shipping Unit
10686	GAC-1xDMX & 2x1.5 mm ²	6.5	light grey	200 m	14.0 kg	2 x 200 m