


### SPK 6x4.00 mm<sup>2</sup> speaker (56040)

High flexible speaker cable for power amplifiers up to 2750 watts. 224 strands of 0.15 mm bare copper wires, fine stranding for best flexibility but still affordable price. Best cost effectiveness yet still very flexible construction. Easy application to most connectors. PVC strands do keep the cable construction round and stable

#### Flameretarded PVC jacket (IEC 60332-3)

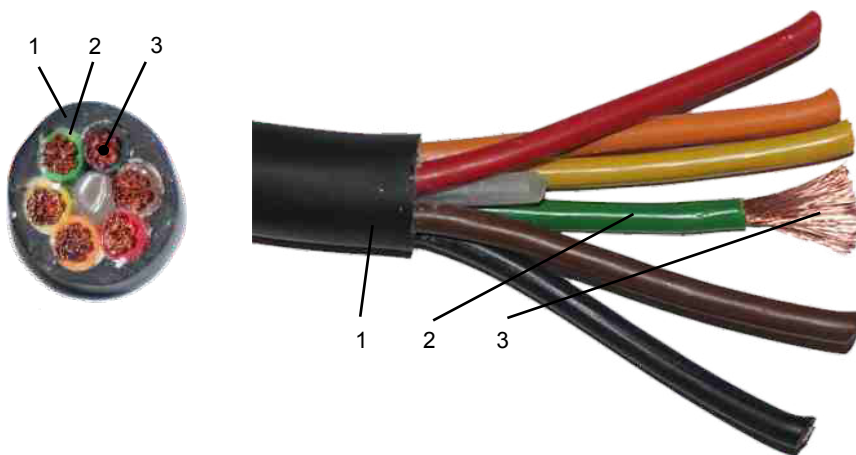

1	Jacket	PVC, ø 14.8 mm, black
2	Insulation	PVC, ø 3.9 mm, black, red, brown, orange, green and yellow
3	Conductor	(OFC) Stranded bare copper wires, 224 x 0.15 mm (3.96 mm <sup>2</sup> )

Conductor resistance	< 4.65 Ohm /km	Test voltage cond/cond	2000 V eff.
Insulation resistance	> 200 MOhm /km	Temperature range (flex)	- 5° to +50° C
		Temperature range (fix)	-30° to +70° C
Power rating	2750 Watt		
Current max.	24.0 Ampere	Bending radius min.	5x overall diam.

Order No.	Type	ø mm	Color	Spool Size	Weight /Spool	Shipping Unit
56040	SPK 6x4.00 mm <sup>2</sup>	14.8	black	100 m	42.0 kg	1 x 100 m