


GVC-1 RG59 B/U video installation (02980)

GVC-1 RG59 B/U (02980) professional RG59 75 ohm videocable. Flexible construction. Low signal loss. LFOC higher grade copper at best standards for best performance.

Industrial standard videocables meeting all standards.

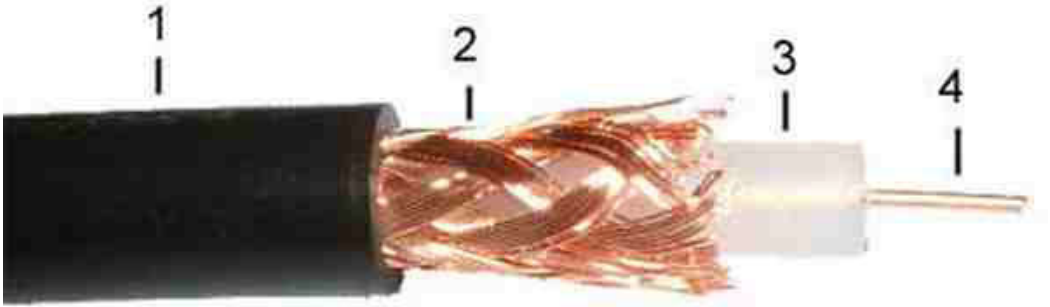

1	Jacket	PVC, \varnothing 6.15 mm, black
2	Shield No. 1	Braiding with tinned copper wires SnCu (0.16 mm), coverage min. 95%
3	Insulation	LDPE, \varnothing 3.70 mm
4	Conductor	40% conductivity copper clad steel wire, \varnothing 0.58 mm

Conductor resistance	< 152.4 Ohm /km	Capacitance	< 67.3 nF /km
Attenuation @ 400 MHz	< 29.6 db/100 m	Charac. imped. @ 200 MHz	75 Ohm \pm 3
Insulation resistance	> 10GOhm /km	Temperature range (flex)	- 5° to +50° C
		Temperature range (fix)	-30° to +70° C

Order No.	Type	\varnothing mm	Color	Spool Size	Weight /Spool	Shipping Unit
02980	GVC-1 RG59	6.15	black	100 m	6.5 kg	4 x 100 m